


## QwikStik LED Series



# Qwik STIK LED FLAT

*The Qwik Stik Flat is great for perimeter lighting!*

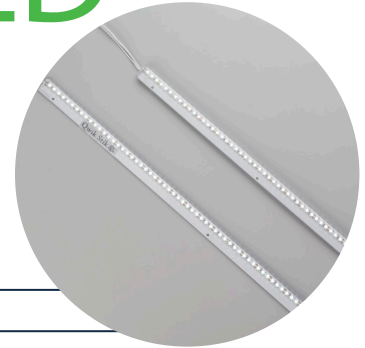

### HIGHLIGHTS

- Reflective white aluminum substrate for rigidity and superior heat sinking
- Bend around corners for perimeter lighting
- Available in sizes from 12"-96"
- Exceeds the output of standard T-12 lamps to the sign face
- UV stabilized jacket for added water resistance (IP66)
- 50-70% energy savings over T-12 lit signs
- 40-70% less expensive than other LED brands

### SPECIFICATIONS

Dimensions	0.77"W x 0.17"H x Length
Beam Angle	120°
Operating Temp.	-40 to +60°C
Efficacy (White)	~93 LM/W (System)
Power Supply	P-LED 12VDC
Fastening	Mechanical Screw Hole
Packaging	15 per case (30 per 3" tube)
Warranty	5 year (Product) / 2 Year (Ltd Labor)

Description	P-LED Part Number
Qwik Stik 6' Whip End x1	PL-QS-WH6-X1



### PRODUCT DESCRIPTIONS

Length	Lumens	Watts	Sticks per 60W PS	Sticks per 120W PS	Sticks per 264W PS	P-LED Part Number*
.77"W x 0.17"H x 12" L	238	2.4	25	50	100	PL-QS12-XX-FL
.77"W x 0.17"H x 18" L	324	3.2	18	36	72	PL-QS18-XX-FL
.77"W x 0.17"H x 24" L	477	4.7	12	24	48	PL-QS24-XX-FL
.77"W x 0.17"H x 30" L	662	6.5	9	18	36	PL-QS30-XX-FL
.77"W x 0.17"H x 36" L	828	8.1	7	14	28	PL-QS36-XX-FL
.77"W x 0.17"H x 42" L	945	9.3	6	12	24	PL-QS42-XX-FL
.77"W x 0.17"H x 48" L	1095	10.7	5	10	20	PL-QS48-XX-FL
.77"W x 0.17"H x 60" L	1370	13.4	4	8	16	PL-QS60-XX-FL
.77"W x 0.17"H x 64" L	1452	14.2	4	8	16	PL-QS64-XX-FL
.77"W x 0.17"H x 72" L	1592	15.6	3	6	12	PL-QS72-XX-FL
.77"W x 0.17"H x 84" L	1832	18	3	6	12	PL-QS84-XX-FL
.77"W x 0.17"H x 96" L	2158	21.2	2	4	8	PL-QS96-XX-FL

\*XX = PW (6300K - Daylight), MW (4300K Cool White), WW (3100K Warm White)