


NEW CLASS II POWER SUPPLIES

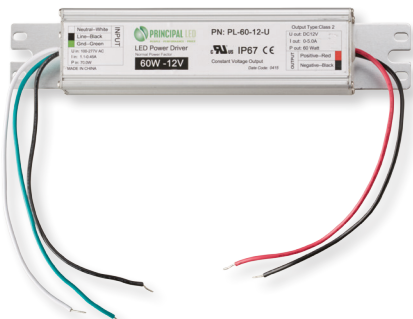

Universal 60W

PL-60-12-U

- ▶ -30 to 60°C operating temperature
- ▶ Ballast style for raceway applications
- ▶ UL/cUL Class II power source
- ▶ Fully encapsulated, IP67 rated
- ▶ Fits into Qwik Box

P-LED's heavy duty Class II "universal" power supply that operates from 120 VAC up to 277 VAC.




Threaded Universal 60W

PL-60-12-MU

- ▶ -30 to 60°C operating temperature
- ▶ UL/cUL Class II power source
- ▶ Operates from 120VAC up to 277 VAC
- ▶ Fully encapsulated, IP67 rated

P-LED's threaded option of our heavy duty Class II "universal" power supply for easy installation and use with conduit and fittings.

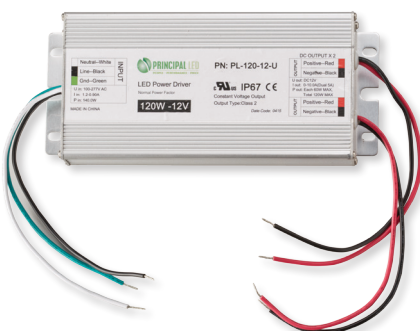

Universal 120W

PL-120-12-U

- ▶ -30 to 60°C operating temperature
- ▶ Dual output (2 X 5A channels)
- ▶ Metal casing
- ▶ Fully encapsulated, IP67 rated
- ▶ UL/cUL Class II power source


Cuts the number of power supplies required for a job and the installation time for primary wiring in half! Very versatile. Operates from 120 VAC to 277 VAC with two 60W legs.

Now Available!

Guaranteed by our industry leading
5&5 Warranty
 when used as a Principal LED system

Standard 60W

PL-PS-60-12

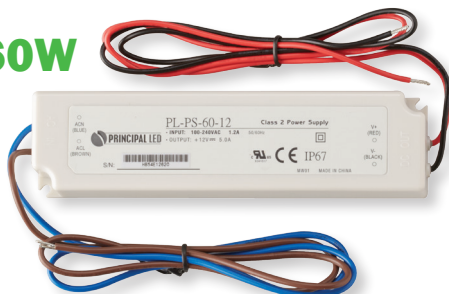

- ▶ AC input from 100 to 240 VAC
- ▶ Fully encapsulated, IP67 rated
- ▶ -40 to 80°C operating temperature
- ▶ Slim design for raceways / enclosures
- ▶ UL, cUL, Class II power source

*5 Year Product & 5 Year Limited Labor Warranty. For details please visit www.p-led.com.

Visit www.p-led.com to find a Principal LED distributor near you

