

**BLP-600**  
Socket line with open  
spelter socket each end,  
pins parallel



**BLP-601**  
Socket line with open  
spelter socket each end,  
pins at right angles

**Features:**

- Heavy gauge stainless steel tag in accordance with ASME B30.9 and API RP2D
- Proof tested to 2X Rated Capacity
- Spelter sockets attached with WIRELOCK®
- 6x19 Class IWRC EIP bright wire rope supplied standard up to 2"
- 6x36 Class IWRC EIP bright wire rope supplied standard on 2-1/2" and larger
- 100% termination efficiency
- Design factor 5 to 1

**How to order:**

- Specify part number and length in feet when ordering


**WARNING**

See wire rope sling warnings page for warnings and inspection criteria

Dia. of Rope	BLP-600	BLP-601	Min. Sling Length ft.-in.	EIPS Rated Capacity in Short Tons	EEIP Rated Capacity in Short Tons
3/8"	11131305	11181805	1-0	1.5	1.7
1/2"	11131307	11181807	1-3	2.7	2.9
5/8"	11131309	11181809	1-6	4.1	4.5
3/4"	11131310	11181810	1-9	5.9	6.5
7/8"	11131311	11181811	2-0	8.0	8.8
1"	11131312	11181812	2-6	10	11.4
1-1/8"	11131313	11181813	2-9	13	14.3
1-1/4"	11131314	11181814	3-0	16	17.6
1-3/8"	11131315	11181815	3-0	19	20.2
1-1/2"	11131316	11181816	3-3	23	25
1-3/4"	11131318	11181818	4-3	31	33.8
2"	11131320	11181820	4-9	40	43.4
2-1/2"	11131324	11181824	5-9	60	66
2-3/4"	11131325	11181825	6-2	72	79
3"	11131327	11181827	6-6	85	94
3-1/2"	11131331	11181831	7-6	113	124

**Note:**

- Specify wire rope construction, grade, and finish if other than standard
- See weights page for weights

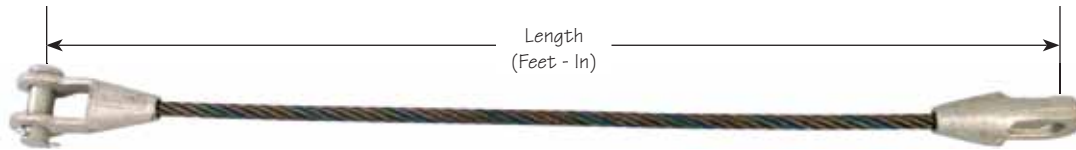

### BLP-602

Socket line with open spelter socket one end and closed spelter socket other end, pins parallel



### BLP-603

Socket line with open spelter socket one end and closed spelter socket other end, pins at right angles

#### Features:

- Heavy gauge stainless steel tag in accordance with ASME B30.9 and API RP2D
- Proof tested to 2X Rated Capacity
- Spelter sockets attached with WIRELOCK®
- 6x19 Class IWRC EIP bright wire rope supplied standard up to 2"
- 6x36 Class IWRC EIP bright wire rope supplied standard on 2-1/2" and larger
- 100% termination efficiency
- Design factor 5 to 1

#### How to order:

- Specify part number and length in feet when ordering


### **WARNING**

See wire rope sling warnings page for warnings and inspection criteria

Dia. of Rope	BLP-602	BLP-603	Min. Sling Length ft.-in.	EIPS Rated Capacity in Short Tons	EEIP Rated Capacity in Short Tons
3/8"	11131205	11181705	1-0	1.5	1.7
1/2"	11131207	11181707	1-3	2.7	2.9
5/8"	11131209	11181709	1-6	4.1	4.5
3/4"	11131210	11181710	1-9	5.9	6.5
7/8"	11131211	11181711	2-0	8.0	8.8
1"	11131212	11181712	2-6	10	11.4
1-1/8"	11131213	11181713	2-9	13	14.3
1-1/4"	11131214	11181714	3-0	16	17.6
1-3/8"	11131215	11181715	3-0	19	20.2
1-1/2"	11131216	11181716	3-3	23	25
1-3/4"	11131218	11181718	4-3	31	33.8
2"	11131220	11181720	4-9	40	43.4
2-1/2"	11131224	11181724	5-9	60	66
2-3/4"	11131225	11181725	6-2	72	79
3"	11131227	11181727	6-6	85	94
3-1/2"	11131231	11181731	7-6	113	124

#### Note:

- Specify wire rope construction, grade, and finish if other than standard
- See weights page for weights

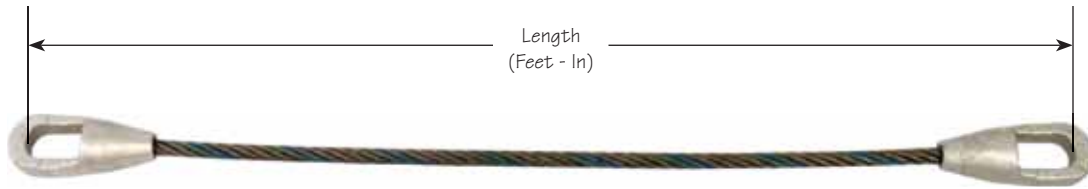

### BLP-604

Socket line with closed spelter  
socket each end, pins parallel



### BLP-605

Socket line with closed spelter  
socket each end, pins at right  
angles

#### Features:

- Heavy gauge stainless steel tag in accordance with ASME B30.9 and API RP2D
- Proof tested to 2X Rated Capacity
- Spelter sockets attached with WIRELOCK®
- 6x19 Class IWRC EIP bright wire rope supplied standard up to 2"
- 6x36 Class IWRC EIP bright wire rope supplied standard on 2-1/2" and larger
- 100% termination efficiency
- Design factor 5 to 1

#### How to order:

- Specify part number and length in feet when ordering

### **WARNING**

See wire rope sling warnings page  
for warnings and inspection criteria

Dia. of Rope	BLP-604	BLP-605	Min. Sling Length ft.-in.	EIPS Rated Capacity in Short Tons	EEIP Rated Capacity in Short Tons
3/8"	11121205	11171705	1-0	1.5	1.7
1/2"	11121207	11171707	1-3	2.7	2.9
5/8"	11121209	11171709	1-6	4.1	4.5
3/4"	11121210	11171710	1-9	5.9	6.5
7/8"	11121211	11171711	2-0	8.0	8.8
1"	11121212	11171712	2-6	10	11.4
1-1/8"	11121213	11171713	2-9	13	14.3
1-1/4"	11121214	11171714	3-0	16	17.6
1-3/8"	11121215	11171715	3-0	19	20.2
1-1/2"	11121216	11171716	3-3	23	25
1-3/4"	11121218	11171718	4-3	31	33.8
2"	11121220	11171720	4-9	40	43.4
2-1/2"	11121224	11171724	5-9	60	66
2-3/4"	11121225	11171725	6-2	72	79
3"	11121227	11171727	6-6	85	94
3-1/2"	11121231	11171731	7-6	113	124

#### Note:

- Specify wire rope construction, grade, and finish if other than standard
- See weights page for weights